

STREET LIGHTING

LUMINAIRE

NS
SERIES




APPLICATIONS

- Streets and Roads
- Parks and Car Parks
- Residential Areas
- Industrial Areas
- Highways & Cross Roads

FEATURES

- Low Maintenance Cost
- Tool Free Open From Top
- IP66 rating
- Manufacturing complying with EN 60598-1
- Made in Turkey
- Approved By Turkey General Directorate of Highways

LIGHT DISTRIBUTION CURVES

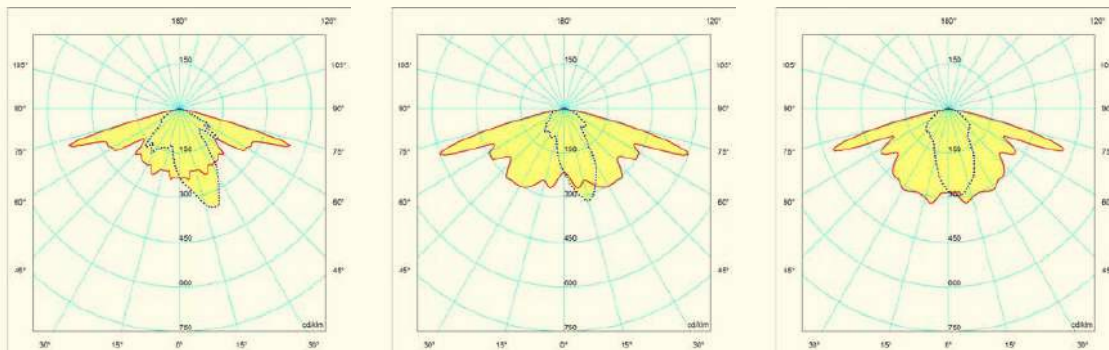



Power W	Lamp Type	Current A	Luminaire Lamp Type	Figure	a mm	b mm	c mm	Lamp Holder Type	Pole Mount Consale	Weight kg	Capacitor mf	IP	Quality Certificates
220V - 230V, 50Hz													
			NS E-40	1	765	410	175	E-40	φ42- φ60	9,846			TSE/CE
150	SV	1,80	NS 150	1	765	410	175	E-40	φ42- φ60	11,980	20	66	TSE/CE
210	SV	2,15	NS 210	1	765	410	175	E-40	φ42- φ60	12,270	20	66	TSE/CE
250	HG	2,15	NS 250	1	765	410	175	E-40	φ42- φ60	12,270	20	66	TSE/CE
250	SV	3,00	NS 250	1	765	410	175	E-40	φ42- φ60	13,049	32	66	TSE/CE
400	HG	3,15	NS 400	1	765	410	175	E-40	φ42- φ60	13,080	32	66	TSE/CE
400	MH	3,50	NS 400	1	765	410	175	E-40	φ42- φ60	13,203	35	66	TSE/CE
400	SV	4,60	NS 400	1	765	410	175	E-40	φ42- φ60	13,435	45	66	TSE/CE

Power W	Lamp Type	Current A	Luminaire Lamp Type	Figure	a mm	b mm	c mm	Lamp Holder Type	Pole Mount Consale	Weight kg	Capacitor mf	IP	Quality Certificates
220V - 230V, 50Hz													
			NS E-40	1	765	410	175	E-40	φ42- φ60	9,846		66	ENEC
150	SV	1,80	NS 150	1	765	410	175	E-40	φ42- φ60	12,000	20	66	ENEC
210	SV	2,15	NS 210	1	765	410	175	E-40	φ42- φ60	12,300	20	66	ENEC
250	HG	2,15	NS 250	1	765	410	175	E-40	φ42- φ60	12,300	20	66	ENEC
250	SV	3,00	NS 250	1	765	410	175	E-40	φ42- φ60	13,099	32	66	ENEC
400	SV	4,60	NS 400	1	765	410	175	E-40	φ42- φ60	13,500	45	66	ENEC

Seal Type : Resistant To Heat Silicon
 Diffuser : Tempered Flat Glass
 Power Factor : 0,95 - 1
 Body Type : Aluminium Die Cast, IK09
 Box Dimension : 775mmx415mmx185mm

