

LED STREET LIGHTING

LUMINAIRE

SHARK
SERIES



APPLICATIONSS

- Streets and Roads
- Parks and Car parks
- Residential Areas
- Industrial Areas

FEATURES


- Road lighting complying with relevant standards and glare regulations
- Long life due to thermal design cooling block
- IP66 rating
- Entirely domestic manufacturing except for Led and drivers




SHARK LED ROAD LIGHTING LUMINAIRE

	350mA				530mA				700mA				1050mA				Color Temperature	CRI
	LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE		LED MODULE		LUMINAIRE			
12LED	13 W	2080 lm	15 W	1784 lm	19 W	2945 lm	21 W	2499 lm	25 W	3625 lm	27 W	3105 lm	37 W	4921 lm	40 W	4120 lm	3000 K 4000 K 5000 K 6000 K 6500 K	CRI > 70
24LED	26 W	5160 lm	29 W	3567 lm	38 W	5890 lm	42 W	4998 lm	50 W	7250 lm	54 W	6210 lm	74 W	9842 lm	80 W	8240 lm		
36LED	39 W	6240 lm	43 W	5290 lm	57 W	8835 lm	62 W	7440 lm	75 W	10875 lm	81 W	9315 lm	111 W	14765 lm	120 W	12360 lm		
48LED	52 W	8320 lm	58 W	7135 lm	76 W	11780 lm	83 W	9960 lm	100 W	14500 lm	108 W	12420 lm	148 W	19685 lm	160 W	16480 lm		

LIGHT DISTRIBUTION CURVES

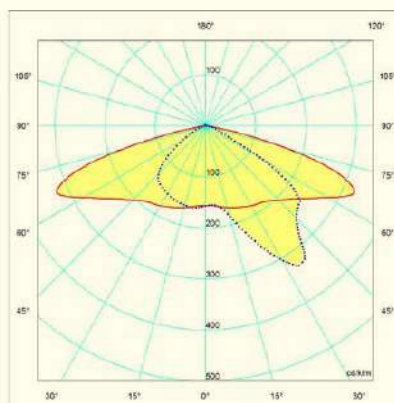

DIMENSIONS

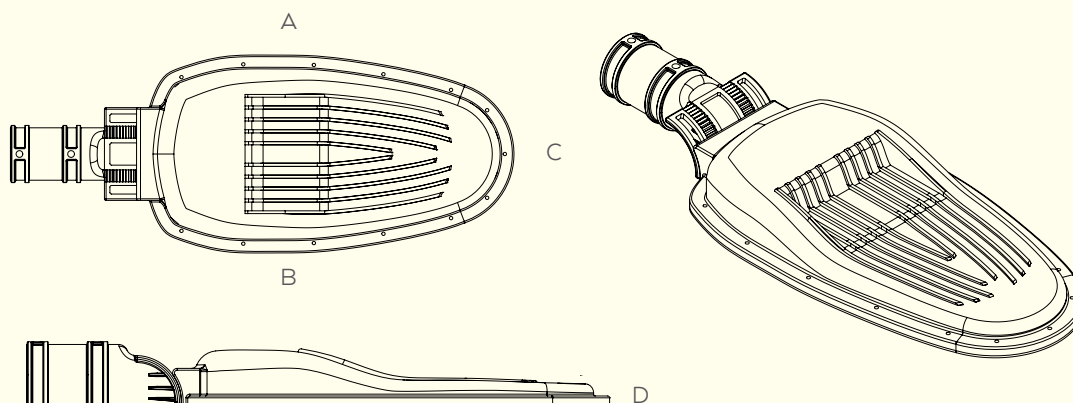

Kod	A (mm)	B (mm)	C (mm)	D (mm)
SHARK S	630	475	240	65
SHARK M	690	535	305	65