


# STREET LIGHTING

## LUMINAIRE

TPY

SERIES

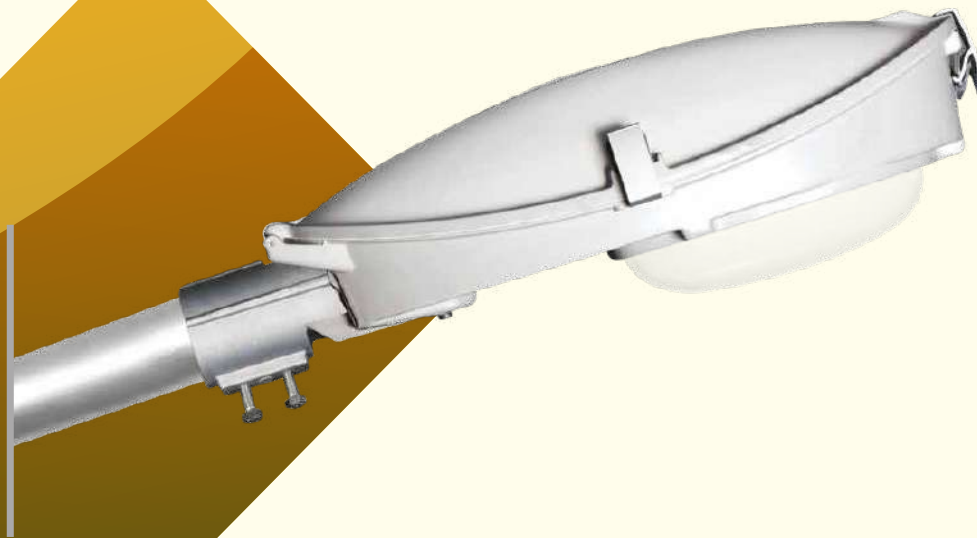

### APPLICATIONS

- Highways
- Street and Roads
- Industrial Fields
- Residential Areas
- Parks
- Perimeter and Security Lighting
- Cross Roads
- Car Parks

### FEATURES

- Ergonomic Body
- Open from Top
- Monoblock Anodized High Purity Aluminium Reflector
- Removable Ballast Kit
- Low Maintenance Cost
- Tool Free Opening System

IP65



Power W	Lamp Type	Current A	Luminaire Lamp Type	Figure	a mm	b mm	c mm	Lamp Holder Type	Pole Mount Consale	Weight kg	Capacitor mf	IP	Quality Certificates
220V, 50Hz													
			TPY E-27	1	560	240	170	E - 27	φ42- φ60	2,000		65	TSE/CE
50	SV	0,76	TPY 50	1	560	240	170	E - 27	φ42- φ60	4,020	10	65	TSE/CE
70	SV	1,00	TPY 70	1	560	240	170	E - 27	φ42- φ60	4,134	12	65	TSE/CE
110	SV	1,15	TPY 110	1	560	240	170	E - 27	φ42- φ60	4,200	10	65	TSE/CE
125	HG	1,15	TPY 125	1	560	240	170	E - 27	φ42- φ60	4,200	10	65	TSE/CE
230V, 50Hz													
50	SV	0,76	TPY 50	1	560	240	170	E - 27	φ42- φ60	4,030	10	65	TSE/CE
70	SV	1,00	TPY 70	1	560	240	170	E - 27	φ42- φ60	4,144	12	65	TSE/CE
110	SV	1,15	TPY 110	1	560	240	170	E - 27	φ42- φ60	4,210	10	65	TSE/CE
125	HG	1,15	TPY 125	1	560	240	170	E - 27	φ42- φ60	4,210	10	65	TSE/CE

Seal Type : Resistant To Heat Silicon  
 Diffuser : Polycarbon  
 Power Factor : 0,95 - 1  
 Body Type : Polymer / GRP, IK 08  
 Box Dimension : 570mmx240mmx175mm

### LIGHT DISTRUBUTION CURVES

