


STREET LIGHTING

LUMINAIRE

TSO
SERIES

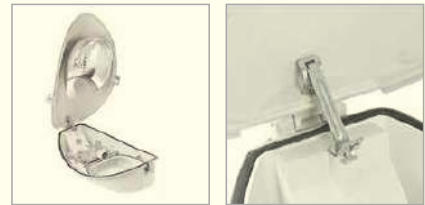

APPLICATIONS

- Highways
- Street and Roads
- Industrial Fields
- Residential Areas
- Parks
- Perimeter and Security Lighting
- Cross Roads
- Car Parks

FEATURES

- Ergonomic Body
- Monoblock Anodized High Purity Aluminium Reflector
- Open from Top
- Removable Ballast Kit
- Low Maintenance Cost
- Tool Free Opening System



Power W	Lamp Type	Current A	Luminaire Lamp Type	Figure	a mm	b mm	c mm	Lamp Holder Type	Pole Mount Consale	Weight kg	Capacitor mf	IP	Quality Certificates
220V, 50Hz													
100	SV	1,15	TSO 100	2	605	260	140	E-40	φ42- φ60	6,000	14	65	TSE/CE
230V, 50Hz													
100	SV	1,15	TSO 100	2	605	260	140	E-40	φ42- φ60	6,020	14	65	TSE/CE

Seal Type : Resistant To Heat Silicon
 Diffuser : Polycarbon
 Power Factor : 0,95 - 1
 Body Type : Polymer / GRP, IK 08
 Box Dimension : 615mmx275mmx155mm

LIGHT DISTRUBTION CURVES

