




Dimensions

L1	L2	W	H1	H2
487mm	565mm	295mm	74mm	195mm

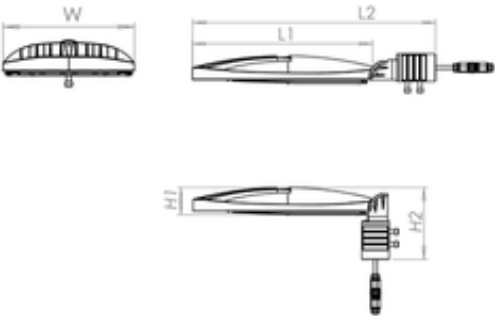

Order Code

AR		Material Group
TU0		Product Model
C		Lumen Segment
100		Product Power (W)
47		Color and CRI Options
12		Optical Options
01		System Option
716		Body Color Option

AR	-	TU0	-	C	-	100	-	47	-	12	-	01	-	716
----	---	-----	---	---	---	-----	---	----	---	----	---	----	---	-----

Specifications

- Minimum 70 mic. electrostatic powder-coated aluminum injection body
- Minimum 70 mic. electrostatic powder-coated adjustable mounting arm with horizontal (-15°, +15°) and vertical (0°, +15°) angles
- High Power LED with L90B10 >100,000 hours and high luminous efficacy
- IP67 PMMA optical lens options suitable for all road classifications
- High-efficiency driver with constant current output
- One-piece silicone gasket resistant to high and low temperatures
- Stainless steel mounting accessories
- Optional 10kV surge protector resistant to mains voltage fluctuations

Nominal Power	100 W		
Nominal Voltage	220-240 VAC - 50-60 HZ		
Luminous Flux	C	B	A
	12.500 lm*	13.500 lm*	15.000 lm*
Efficiency	125 lm/W	135 lm/W	150 lm/W
Power Factor	≥0,95		
IEC Protection Class	Class I		
Surge Protection	6-10 Kv		
Mounting Diameters	Ø42 mm - Ø60 mm		
Dimensions	658x295x82 mm		
Weight	5,5 kg		

*The given lumen value is valid for 4000K-70CRI. Please contact us for other options.

Options



Light Color and CRI Options	3000 K - CRI 70	37
	3000 K - CRI 80	38
	4000 K - CRI 70	47
	4000 K - CRI 80	48
	6500 K - CRI 70	67
	6500 K - CRI 80	68

System Options	On-Off Std	01
	1-10V Dim	02
	DALI	07



Road Optic Options	S9M3	10
	S10M3	11
	S11M3	12
	S13M4	14

Body Colour Options	RAL7016MAT	716
	RAL9005MAT	905
	RAL9016MAT	916



S9M3



S10M3



S11M3



S13M4

