




Dimensions

L	W	H1	H2
546mm	372mm	75mm	258mm

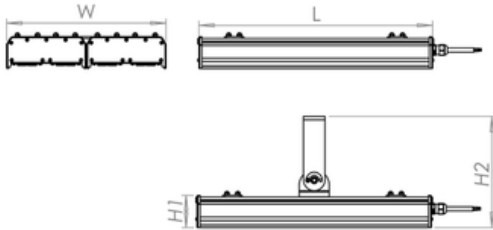

Order Code

AR	Material Group
HW4	Product Model
C	Lumen Segment
220	Product Power (W)
47	Color and CRI Options
07	Optical Options
01	System Option
716	Body Color Option

AR	-	HW4	-	C	-	220	-	47	-	07	-	01	-	716
----	---	-----	---	---	---	-----	---	----	---	----	---	----	---	-----

Specifications

- Minimum 20 mic. anodized aluminum extrusion profile
- Minimum 70 mic. electrostatic powder coated side cover
- Minimum 70 mic. electrostatic coated DKP / Galvanized brackets
- High Power LED with L90B10 >100,000 hours and high luminous efficacy
- IP67 PMMA optical lens options suitable for all facade lighting
- High-efficiency IP67 driver with constant current output
- One-piece silicone gasket resistant to high and low temperatures
- Stainless steel mounting accessories
- Optional 10kV surge protector resistant to mains voltage fluctuations

Nominal Power	220 W		
Nominal Voltage	220-240 VAC - 50-60 HZ		
Luminous Flux	C	B	A
	27.500 lm*	29.700 lm*	33.000 lm*
Efficiency	125 lm/W	135 lm/W	150 lm/W
Power Factor	≥0,95		
IEC Protection Class	Class I		
Surge Protection	6-10 Kv		
Dimensions	546 x 372 x 74 mm		
Weight	10,0 kg		

*The given lumen value is valid for 4000K-70CRI. Please contact us for other options.

Options


Light Color and CRI Options	3000 K - CRI 70	37
	3000 K - CRI 80	38
	4000 K - CRI 70	47
	4000 K - CRI 80	48
	6500 K - CRI 70	67
	6500 K - CRI 80	68

System Options	On-Off Std	01
	1-10V Dim	02
	DALI	07

Optic Options	10 Degree	04
	25 Degree	05
	60 Degree	07
	90 Degree	08
	Simetric Oval Beam	09

Body Colour Options	RAL7016MAT	716
	RAL9005MAT	905
	RAL9016MAT	916


10 Degree




25 Degree



60 Degree



90 Degree



Simetric Oval Beam



