



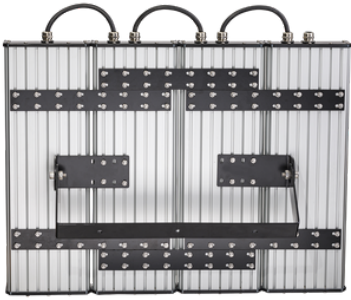

## Dimensions

| L     | W     | H1   | H2    |
|-------|-------|------|-------|
| 546mm | 746mm | 75mm | 258mm |

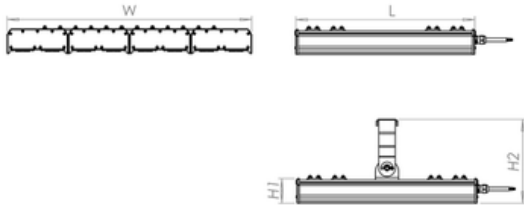

## Order Code

|     |                       |
|-----|-----------------------|
| AR  | Material Group        |
| HW6 | Product Model         |
| C   | Lumen Segment         |
| 500 | Product Power (W)     |
| 47  | Color and CRI Options |
| 07  | Optical Options       |
| 01  | System Option         |
| 716 | Body Color Option     |

|    |   |     |   |   |   |     |   |    |   |    |   |    |   |     |
|----|---|-----|---|---|---|-----|---|----|---|----|---|----|---|-----|
| AR | - | HW6 | - | C | - | 500 | - | 47 | - | 07 | - | 01 | - | 716 |
|----|---|-----|---|---|---|-----|---|----|---|----|---|----|---|-----|

## Specifications

- Minimum 20 mic. anodized aluminum extrusion profile
- Minimum 70 mic. electrostatic powder coated side cover
- Minimum 70 mic. electrostatic coated DKP / Galvanized brackets
- High Power LED with L90B10 >100,000 hours and high luminous efficacy
- IP67 PMMA optical lens options suitable for all facade lighting
- High-efficiency IP67 driver with constant current output
- One-piece silicone gasket resistant to high and low temperatures
- Stainless steel mounting accessories
- Optional 10kV surge protector resistant to mains voltage fluctuations

|                      |                        |            |            |
|----------------------|------------------------|------------|------------|
| Nominal Power        | 500 W                  |            |            |
| Nominal Voltage      | 220-240 VAC - 50-60 HZ |            |            |
| Luminous Flux        | C                      | B          | A          |
|                      | 62.500 lm*             | 67.500 lm* | 75.000 lm* |
| Efficiency           | 125 lm/W               | 135 lm/W   | 150 lm/W   |
| Power Factor         | ≥0,95                  |            |            |
| IEC Protection Class | Class I                |            |            |
| Surge Protection     | 6-10 Kv                |            |            |
| Dimensions           | 746 x 546 x 74 mm      |            |            |
| Weight               | 20,0 kg                |            |            |

\*The given lumen value is valid for 4000K-70CRI. Please contact us for other options.

## Options


|                             |                 |           |
|-----------------------------|-----------------|-----------|
| Light Color and CRI Options | 3000 K - CRI 70 | <b>37</b> |
|                             | 3000 K - CRI 80 | <b>38</b> |
|                             | 4000 K - CRI 70 | <b>47</b> |
|                             | 4000 K - CRI 80 | <b>48</b> |
|                             | 6500 K - CRI 70 | <b>67</b> |
|                             | 6500 K - CRI 80 | <b>68</b> |

|                |            |           |
|----------------|------------|-----------|
| System Options | On-Off Std | <b>01</b> |
|                | 1-10V Dim  | <b>02</b> |
|                | DALI       | <b>07</b> |

|               |                    |           |
|---------------|--------------------|-----------|
| Optic Options | 10 Degree          | <b>04</b> |
|               | 25 Degree          | <b>05</b> |
|               | 60 Degree          | <b>07</b> |
|               | 90 Degree          | <b>08</b> |
|               | Simetric Oval Beam | <b>09</b> |

|                     |            |            |
|---------------------|------------|------------|
| Body Colour Options | RAL7016MAT | <b>716</b> |
|                     | RAL9005MAT | <b>905</b> |
|                     | RAL9016MAT | <b>916</b> |


10 Degree




25 Degree



60 Degree



90 Degree



Simetric Oval Beam



