


Hawk High Base Pro 150



Dimensions

L	W	H1	H2
724mm	185mm	75mm	86mm

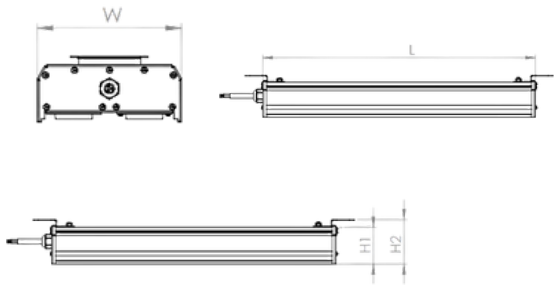

Order Code

AR	Material Group
HLO	Product Model
A	Lumen Segment
150	Product Power (W)
47	Color and CRI Options
07	Optical Options
01	System Option
01	Mounting Option

AR	-	HLO	-	A	-	150	-	47	-	07	-	01	-	01
----	---	-----	---	---	---	-----	---	----	---	----	---	----	---	----

Specifications

- Minimum 20 mic. anodized aluminum extrusion profile
- Minimum 70 mic. electrostatic powder coated side cover
- High-efficiency Mid Power LEDs with L90B10 > 800,000 hours lifetime
- IP67 PMMA optical lens options suitable for various industrial lighting applications
- High-efficiency IP67 driver with constant current output
- One-piece silicone gasket resistant to high and low temperatures
- Stainless steel mounting accessories
- Optional pendant or busbar mounting options

Nominal Power	150 W
Nominal Voltage	220-240 VAC - 50-60 HZ
Luminous Flux	A
	21.750 -24.000 lm
Efficiency	145 -160 lm/W
Power Factor	≥0,95
IEC Protection Class	Class I
Surge Protection	2-4 Kv
Dimensions	724x 185 x 75 mm
Weight	4,6 kg

*The given lumen value is valid for 4000K-70CRI. Please contact us for other options.

Options


Light Color and CRI Options	3000 K - CRI 70	37
	3000 K - CRI 80	38
	4000 K - CRI 70	47
	4000 K - CRI 80	48
	6500 K - CRI 70	67
	6500 K - CRI 80	68

System Options	On-Off Std	01
	1-10V Dim	02
	DALI	07
	DALI with Zhaga Socket	09
	3-Hour Emergency Kit	14
	IN Driver	15


Optic Options	10 Degree	04
	25 Degree	05
	60 Degree	07
	90 Degree	08
	Simetric Oval Beam	09

Mounting Option	Cable Tray Mounting	01
	Busbar Mounting	02
	Pendant Mounting	03


10 Degree




25 Degree



60 Degree



90 Degree



Simetric Oval Beam

