




## Dimensions

L	W	H1	H2
724mm	95mm	75mm	86mm

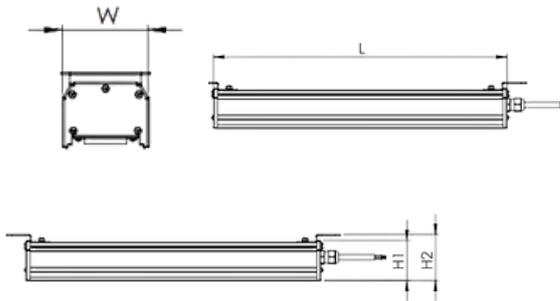

## Order Code

AR	Material Group
HLO	Product Model
B	Lumen Segment
100	Product Power (W)
47	Color and CRI Options
07	Optical Options
01	System Option
01	Mounting Option

AR - HLO - B - 100 - 47 - 07 - 01 - 01

## Specifications

- Minimum 20 mic. anodized aluminum extrusion profile
- Minimum 70 mic. electrostatic powder coated side cover
- High-efficiency Mid Power LEDs with L90B10 > 800,000 hours lifetime
- IP67 PMMA optical lens options suitable for various industrial lighting applications
- High-efficiency IP67 driver with constant current output
- One-piece silicone gasket resistant to high and low temperatures
- Stainless steel mounting accessories
- Optional pendant or busbar mounting options

Nominal Power	100 W
Nominal Voltage	220-240 VAC - 50-60 HZ
Luminous Flux	B
	13.000 - 14.500 lm
Efficiency	130 -145lm/W
Power Factor	≥0,95
IEC Protection Class	Class I
Surge Protection	2-4 Kv
Dimensions	724x95x75 mm
Weight	2,8 kg

\*The given lumen value is valid for 4000K-70CRI. Please contact us for other options.

## Options


Light Color and CRI Options	3000 K - CRI 70	<b>37</b>
	3000 K - CRI 80	<b>38</b>
	4000 K - CRI 70	<b>47</b>
	4000 K - CRI 80	<b>48</b>
	6500 K - CRI 70	<b>67</b>
	6500 K - CRI 80	<b>68</b>

System Options	On-Off Std	<b>01</b>
	1-10V Dim	<b>02</b>
	DALI	<b>07</b>
	DALI with Zhaga Socket	<b>09</b>
	3-Hour Emergency Kit	<b>14</b>
	IN Driver	<b>15</b>


Optic Options	10 Degree	<b>04</b>
	25 Degree	<b>05</b>
	60 Degree	<b>07</b>
	90 Degree	<b>08</b>
	Simetric Oval Beam	<b>09</b>

Mounting Option	Cable Tray Mounting	<b>01</b>
	Busbar Mounting	<b>02</b>
	Pendant Mounting	<b>03</b>


10 Degree

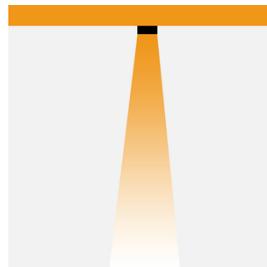


25 Degree

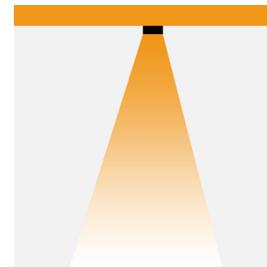

60 Degree

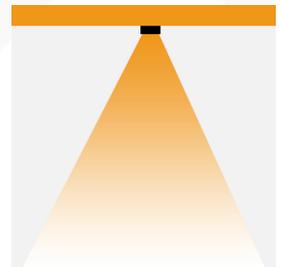

90 Degree

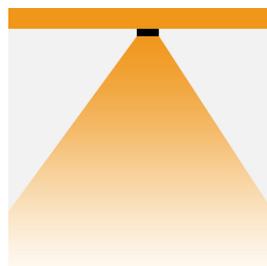

Simetric Oval Beam

