



Specifications

- At least 70 microns electrostatically powder-coated die-cast aluminum body
- At least 70 microns electrostatically powder-coated DKP / galvanized brackets
- 4 mm thick tempered glass
- Mid Power LED with high efficiency factor, L90B10 > 80,000 hours
- PMMA optical lens options suitable for all facade lighting applications
- Constant current output, high-efficiency driver
- One-piece silicone gasket resistant to high and low temperatures
- Corrosion-resistant connection materials
- Optional 10kV lightning protector resistant to power line surges

Nominal Power	150 W
Nominal Voltage	220-240 VAC - 50-60 HZ
Luminous Flux	B
	20.250 lm*
Efficiency	135 lm/W
Power Factor	≥0,95
IEC Protection Class	Class I
Surge Protection	6-10 Kv
Dimensions	400x380x103 mm
Weight	4,9 -5,6 kg

*The given lumen value is valid for 4000K-70CRI. Please contact us for other options.

Options

Light Color and CRI Options	3000 K - CRI 70	37
	3000 K - CRI 80	38
	4000 K - CRI 70	47
	4000 K - CRI 80	48
	6500 K - CRI 70	67
	6500 K - CRI 80	68


System Options	On-Off Std	01
	1-10V Dim	02
	TEDAŞ	06
	DALI	07
	1-10V with Nema Socket	08
	DALI with Zhaga Socket	09

Road Optic Options	S6M2	11

Body Colour Options	RAL7016MAT	716
	RAL9005MAT	905
	RAL9016MAT	916

Dimensions

L1	L2	W	H1	H2
366mm	408mm	432mm	65mm	184mm

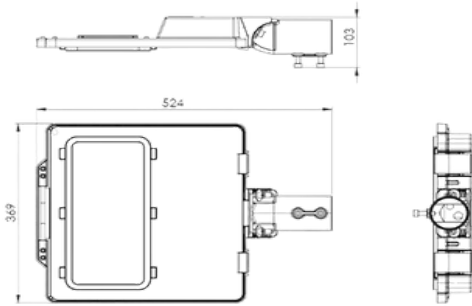

Order Code

AR		Material Group
LN6		Product Model
C		Lumen Segment
150		Product Power (W)
47		Color and CRI Options
07		Optical Options
01		System Option
716		Body Color Option

AR	-	LN6	-	C	-	150	-	47	-	07	-	01	-	716
----	---	-----	---	---	---	-----	---	----	---	----	---	----	---	-----

S6M2

