




## Dimensions

L1	L2	W	H1	H2
339mm	471mm	256mm	68mm	146mm

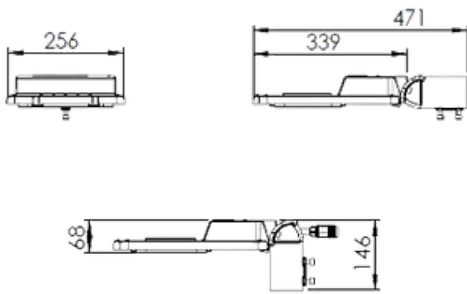

## Order Code

AR	Material Group
LM5	Product Model
C	Lumen Segment
050	Product Power (W)
47	Color and CRI Options
15	Optical Options
01	System Option
716	Body Color Option

AR - LM5 - C - 050 - 47 - 15 - 01 - 716

## Specifications

- At least 70 microns electrostatically powder-coated aluminum injection body
- At least 70 microns electrostatically powder-coated adjustable mounting arm (horizontal: -15°, +15° and vertical: 0°, +15°)
- 4 mm thick tempered glass
- Mid Power LED with high efficiency factor, L90B10 > 80,000 hours
- PMMA optical lens options suitable for all road classes
- Constant current output, high-efficiency driver
- One-piece silicone gasket resistant to high and low temperatures
- One-piece silicone gasket resistant to high and low temperatures
- Optional 10kV lightning protector resistant to power line surges
- Tool-less opening front cover

Nominal Power	50 W
Nominal Voltage	220-240 VAC - 50-60 HZ
Luminous Flux	C
	6.250 lm*
Efficiency	125 lm/W
Power Factor	≥0,95
IEC Protection Class	Class I
Surge Protection	6-10 Kv
Mounting Diameters	Ø42 mm - Ø60 mm
Dimensions	471x256x68mm
Weight	3,0 kg

\*The given lumen value is valid for 4000K-70CRI. Please contact us for other options.

## Options


Light Color and CRI Options	3000 K - CRI 70	<b>37</b>
	3000 K - CRI 80	<b>38</b>
	4000 K - CRI 70	<b>47</b>
	4000 K - CRI 80	<b>48</b>
	6500 K - CRI 70	<b>67</b>
	6500 K - CRI 80	<b>68</b>

System Option	On-Off Std	<b>01</b>
	DALI	<b>07</b>
	1-10V with Nema Socket	<b>08</b>
	DALI with Zhaga Socket	<b>09</b>

Road Optic Options	S15M5	<b>16</b>
	S14M4	<b>15</b>

Body Colour Options	RAL7016MAT	<b>716</b>
	RAL9005MAT	<b>905</b>
	RAL9016MAT	<b>916</b>

## S15M5

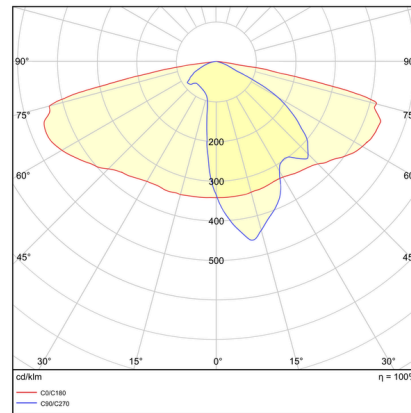

## S14M4

